


Dual Band LO Distributor

FREQUENCY RANGE: DUAL BANDS

- ▶ X: 8÷9 GHz
- ▶ UHF: 870 MHz
- ▶ Splitting & Amplifying
- ▶ Detects Input/Output Power Level: TTL Compatible
- ▶ Excellent In/Out VSWR: 1.3:1
- ▶ Excellent Output Stability: Less than ± 1 dBm
- ▶ High Channel Isolation: 60 dB min
- ▶ Low Output Spurious Level
- ▶ Over All Power Consumption: 12W

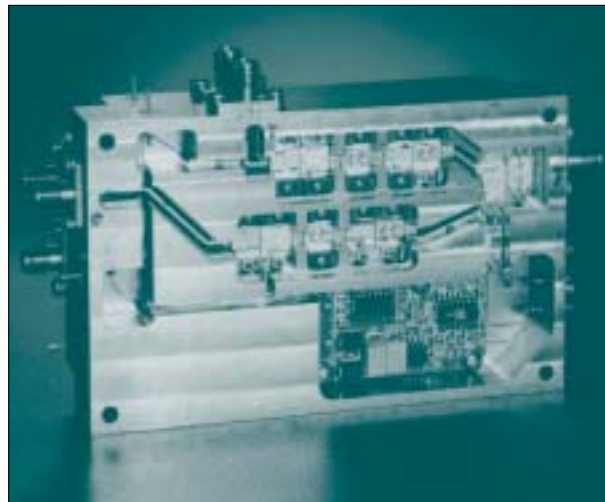

APPLICATIONS

- ▶ EW Systems
- ▶ Transponders
- ▶ Rx/Tx Assemblies

TECHNOLOGY

- ▶ Couplanar Wave Guide
- ▶ MIC For X-Band
- ▶ SMD, MMIC For UHF Channel

