


Dual Channel Front End Receiver

FREQUENCY RANGE: 0.5÷18, 1÷18, 2÷18 GHz

- ▶ High Output 1 dB Compression: +18 dBm
- ▶ Low Noise Figure: 10 dB
- ▶ Integrated Test Generator
- ▶ B.I.T Capabilities: TTL Compatible
- ▶ Low Power Consumption: 10 Watts

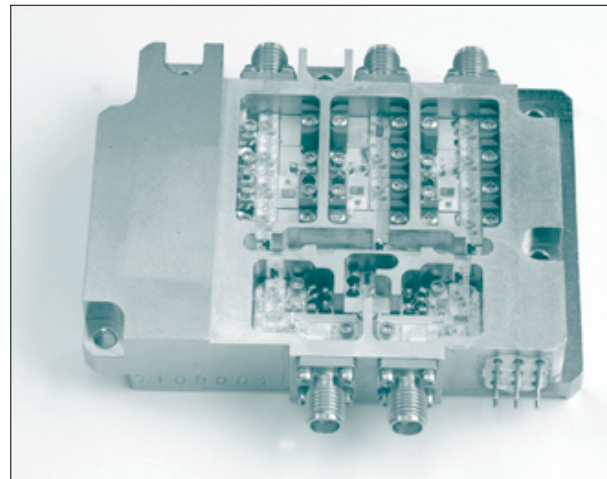

APPLICATION

- ▶ EW-Front End Receivers

TECHNOLOGY

- ▶ Microstrip MIC
- ▶ MMIC Switches
- ▶ Comb Generator
- ▶ SMD
- ▶ Hermetically Laser Sealing

