


# Dual Output Front End Receiver

**FREQUENCY RANGE: 2÷18 GHz**

- ▶ Low Noise Figure: 10 dB
- ▶ High Output 1 dB Compression: +18 dBm
- ▶ High Path Isolation: 60 dB
- ▶ Low Power Consumption: 9W
- ▶ Low Spurious Level
- ▶ Internal Noise Source For BIT

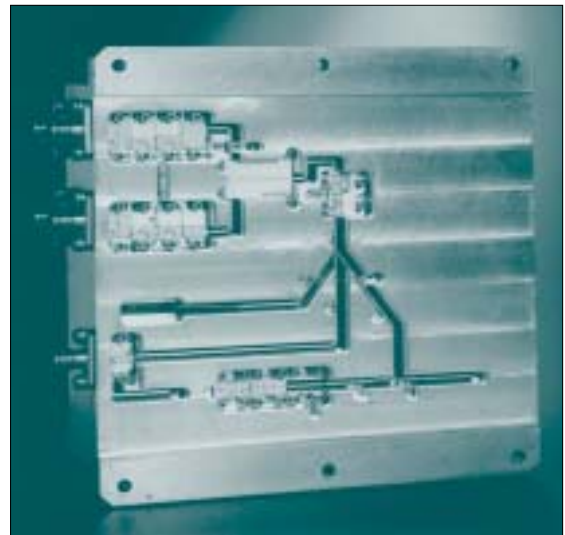

## APPLICATION

- ▶ EW-Front End Receivers

## TECHNOLOGY

- ▶ Microstrip, Strip Line
- ▶ Comb Generator
- ▶ MIC, MMIC
- ▶ SMD
- ▶ Hermetically Laser Sealing

